

- 95 dB LF / 107 dB HF SPL 1W/1m average sensitivity
- Single magnet neodymium motor
- 700W LF - 240W HF maximum program power handling
- 75 mm (3") LF Interleaved Sandwich Voice coil (ISV)
- Aluminum demodulating ring (SDR) for minimum LF distortion
- 60 mm (2.4") HF Titanium diaphragm
- Edge-wound Aluminum ribbon HF voice coil (EWAL)
- HF copper sleeve for reduced distortion and higher output
- 70°H x 50°V nominal coverage
- Suitable for very compact enclosures and stage monitor
- Proprietary Phase Plug (3P)

The 10NCX750H is a 10" neodymium coaxial transducer designed for use in compact reflex enclosures and stage monitors as small as 15lt with a nominal dispersion of 70x50 degrees.



The curvilinear profile LF cone provides smooth response within its intended frequency range thanks to its high damping pulp composition. The 75mm (3in) LF copper voice coil employs Interleaved Sandwich Voice coil (ISV) technology, in which a high strength former carries windings on both the outer and inner surfaces. This results in a balanced coil with a uniform distribution of mass and motive energy and an extremely linear motor assembly. The low distortion and sound quality are further improved by an aluminum demodulating ring (SDR technology) that flattens LF impedance and phase with constant power transfer.

Equipped with a proprietary hybrid radial tangerine phase plug, the integrated HF compression driver has been designed to give a smooth, coherent wavefront at the horn entrance in all working frequency ranges with an high level of manufacturing consistency. The phase plug, with its short openings and high flare rate value, assures low distortion and remarkable improvements in mid-high frequency reproduction. A copper sleeve reduces the inductance value above 10kHz, improving phase and impedance linearization.

The 2.4" diameter HF diaphragm assembly uses a high strength, high temperature treated Nomex voice coil former joined directly to the titanium diaphragm on its upper bend edge, assuring extended frequency energy transfer. This improves linearity and shows unparalleled reliability when compared with a straight former joint. A specific HF exit profile design has been chosen in order to maximize the cone's profile coupling.

The high force neodymium single magnet structure makes the 10NCX750H a lightweight speaker for its performance class - only 4.2KG.

Due to the widespread use of high power audio systems at outdoor events, the ability to perform in adverse weather conditions is an additional key feature of the 10NCX750H. This has been achieved using exclusive cone and magnet plate treatment processes which increase resistance against corrosion and make the cone water repellent.

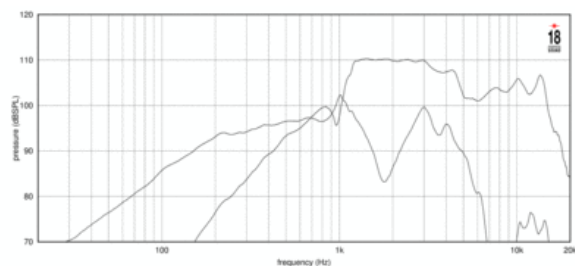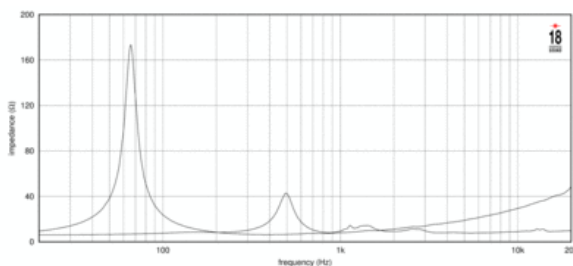



10NCX750H 8Ω

Coaxials - 10.0 Inches

SPECIFICATIONS

| | |
|-------------------------------|------------------|
| Nominal Diameter | 260 mm (10.0 in) |
| Nominal Impedance | 8 Ω |
| Minimum Impedance LF | 6.2 Ω |
| Minimum Impedance HF | 8.0 Ω |
| Frequency Range | 60 - 1500 Hz |
| Dispersion Angle ¹ | 70x50 ° |
| Woofer Cone Treatment | Water repellent |
| Magnet Material | Neodymium |

SPECIFICATIONS HF UNIT

| | |
|---|---------------------|
| HF Sensitivity ⁵ | 105.0 dB |
| HF Nominal Power Handling ⁶ | 120 W |
| HF Continuous Power Handling ⁷ | 240 W |
| HF Voice Coil Diameter | 64 mm (2.5 in) |
| HF Winding Material | Edge wound Aluminum |
| Diaphragm Material | Titanium |
| Recommended Crossover ⁸ | 1.2 kHz |

SPECIFICATIONS LF UNIT

| | |
|---|-------------------|
| LF Sensitivity ² | 95.0 dB |
| LF Nominal Power Handling ³ | 350 W |
| LF Continuous Power Handling ⁴ | 700 W |
| LF Voice Coil Diameter | 75 mm (3.0 in) |
| LF Winding Material | - Copper - |
| Winding Depth | 15.0 mm (0.59 in) |
| Magnetic Gap Depth | 7.6 mm (0.3 in) |

PARAMETERS

| | |
|---------------------|--|
| Resonance Frequency | 65 Hz |
| Re | 5.3 Ω |
| Qes | 0.26 |
| Qms | 8.4 |
| Qts | 0.25 |
| Vas | 21.7 dm ³ (0.77 ft ³) |
| Sd | 346.0 cm ² (53.63 in ²) |
| η _o | 2.2 % |
| Xmax | 5.5 mm |
| Xvar | 7.0 mm |
| Mms | 47.0 g |
| Bl | 19.8 Txm |
| Le | 0.54 mH |
| EBP | 250 Hz |

MOUNTING AND SHIPPING INFO

| | |
|-----------------------------|-------------------|
| Overall Diameter | 310 mm (12.2 in) |
| Bolt Circle Diameter | 295 mm (11.61 in) |
| Baffle Cutout Diameter | 280 mm (11.02 in) |
| Depth | 148 mm (5.83 in) |
| Flange and Gasket Thickness | 14 mm (0.55 in) |
| Net Weight | 4.25 kg (9.37 lb) |
| Shipping Weight | 4.9 kg (10.8 lb) |

1. Included by -6 dB down points.
2. Applied RMS Voltage is set to 2.83V.
3. 2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.
4. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
5. Applied RMS Voltage is set to 2.83V.
6. 2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated nominal impedance. Loudspeaker in free air.
7. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
8. 12 dB/oct. or higher slope high-pass filter.